


911 address shall be a minimum 3" lettering marked on meter enclosure, pole, or durable material attached to pole and should be visible from street. (See sections 1-3, 3, 4)

Shall meet requirements of drawings D4-4, D9-2 and D9-4.

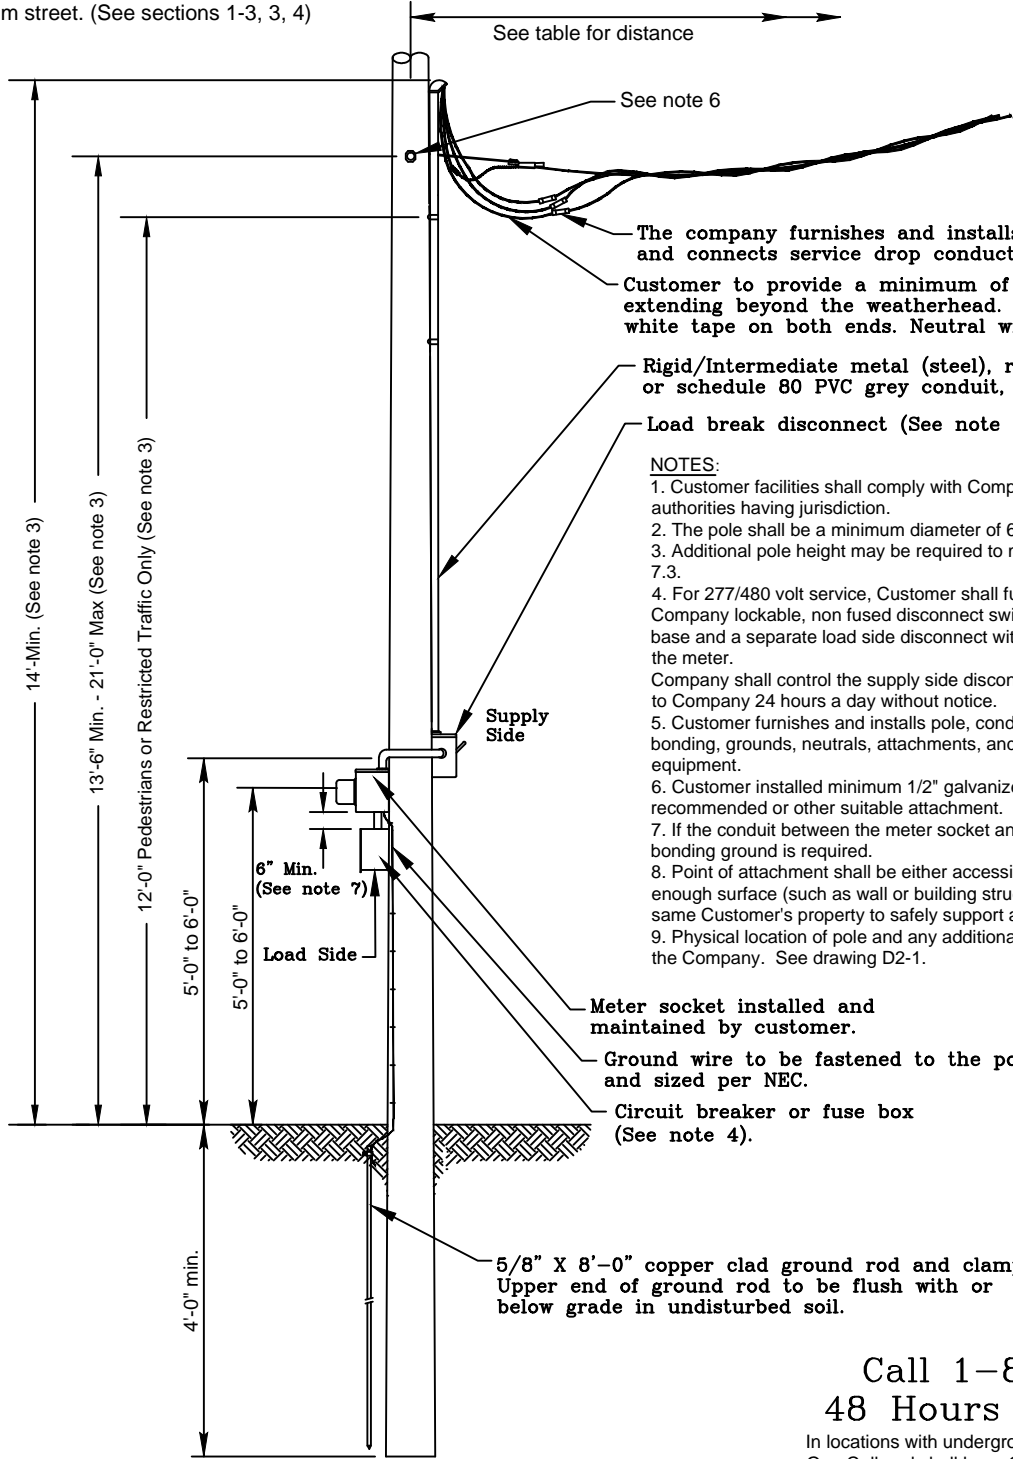

- NOTES:**
- Customer facilities shall comply with Company Standards, the NEC, and authorities having jurisdiction.
 - The pole shall be a minimum diameter of 6" round or 6" X 6" square.
 - Additional pole height may be required to maintain proper clearance per Section 7.3.
 - For 277/480 volt service, Customer shall furnish and install a Company approved Company lockable, non fused disconnect switch on the supply side of the meter base and a separate load side disconnect with overcurrent protection within 2 ft. of the meter. Company shall control the supply side disconnect and it shall be available to Company 24 hours a day without notice.
 - Customer furnishes and installs pole, conduits, conductors sized per NEC, bonding, grounds, neutrals, attachments, and weatherproof service entrance equipment.
 - Customer installed minimum 1/2" galvanized eye bolt with 2" x 2" square washer recommended or other suitable attachment.
 - If the conduit between the meter socket and the main disconnect is not metal, a bonding ground is required.
 - Point of attachment shall be either accessible to Company's bucket truck or have enough surface (such as wall or building structure) and sufficient ground space on same Customer's property to safely support a ladder.
 - Physical location of pole and any additional guying or bracing will be approved by the Company. See drawing D2-1.

Amps	Length
100	100'
200	75'
320	40'


**Call 1-888-258-0808
48 Hours Before You Dig**

In locations with underground facilities, the Customer shall notify One Call and shall have One Call locate all underground facilities before digging. It shall be the responsibility of the Customer to stay clear of all underground facilities.

ENTERGY SERVICES, INC.	
TYPICAL OVERHEAD SELF-CONTAINED 277V/480V INSTALLATION (POLE) (320 AMPS OR LESS)	
APPROVED BY: JRH	DATE: 02/20/13
CHECKED BY: JED	SCALE: NONE
DRAWN BY: krich95	
No. D7-4	
PLOT 1=1	SH. 1 OF 1

2	7/17	Supply Side Disconnect Relocated to the Opposite Side of Pole from Meter	ERG
1	02/13	REVISION OF DRAWING SS7.7-1	JED
NO.	DATE:	REVISION	BY: APPR:

OVERHEAD

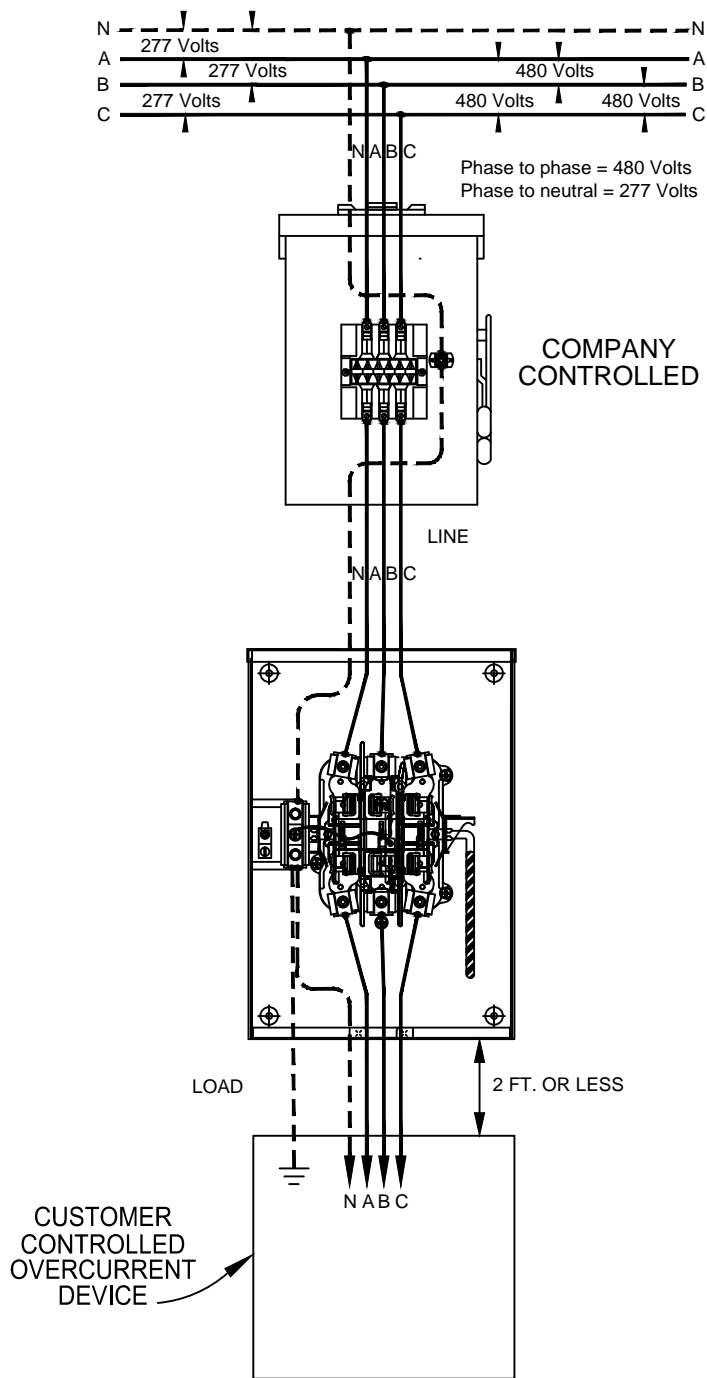

Caution:
For 480 volt service, see drawing D9-2.

For 277/480 volt service, Customer shall furnish and install a Company approved, Company lockable, non fused disconnect switch on the supply side of the meter base and a separate load side disconnect with overcurrent protection within 2 ft. of the meter.

Company shall control the supply side disconnect. It shall be labeled "Utility Disconnect" see 5.5 Labels and Disconnects and it shall be available to Company 24 hours a day without notice.

NOTES:

1. Consult the Company.

ENTERGY SERVICES, INC.

TYPICAL OVERHEAD 3 ϕ 4 WIRE
277/480 INSTALLATION

APPROVED BY: JRH

DATE: 01/14/2013

CHECKED BY: JED

SCALE: NONE

DRAWN BY: krich95

CEA NO.


No. D9-4




PLOT 1=1

SH. 1 OF 1

1	01/13	REVISION OF DRAWING SS11.8-4	JED	
NO.	DATE:	REVISION	BY:	APPR:

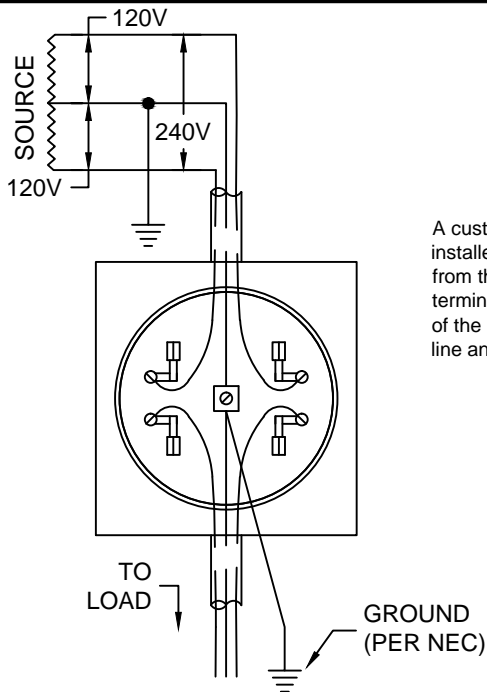

TYPE S
3 WIRE SINGLE PHASE 120/240 VOLTS

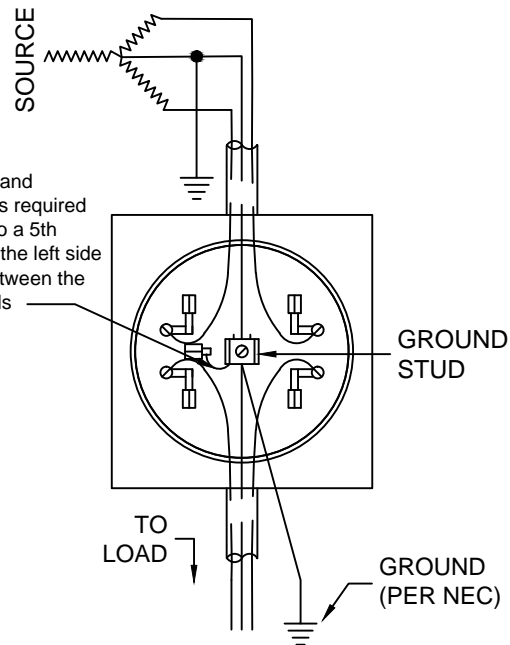


TYPE S
3 WIRE SINGLE PHASE 120/208 WYE VOLTS


A customer supplied and installed teaser wire is required from the neutral lug to a 5th terminal mounted on the left side of the meter block between the line and load terminals

GROUND STUD

GROUND (PER NEC)

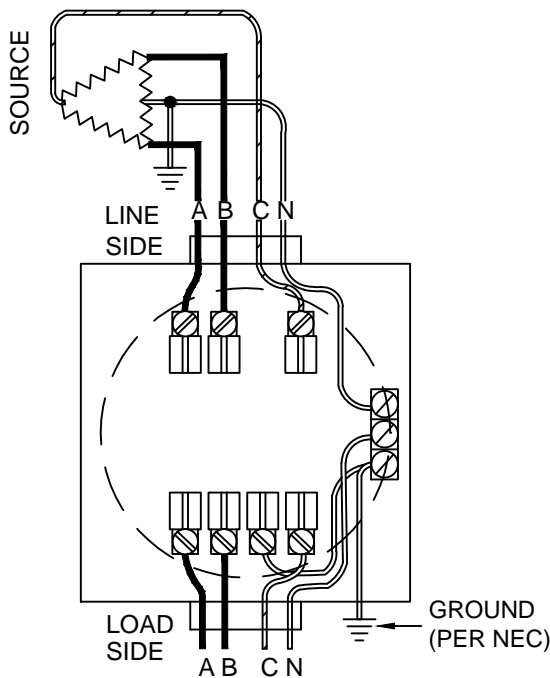

THREE PHASE 4 WIRE DELTA
120 / 240 VOLTS

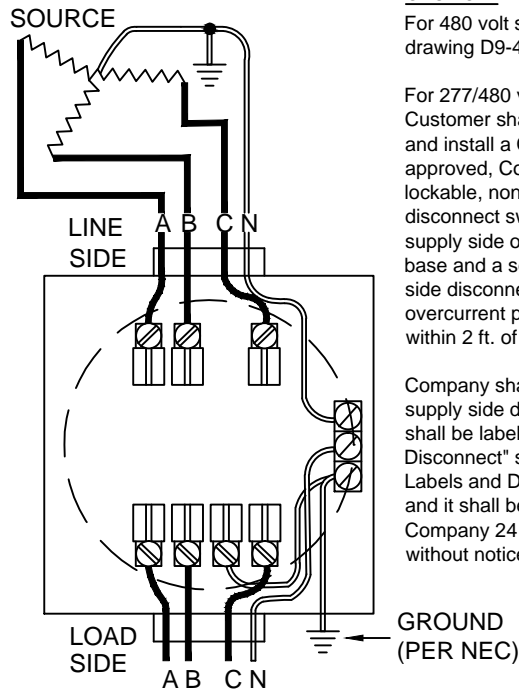

THREE PHASE 4 WIRE WYE
120 / 208 or 277/480 VOLTS

CAUTION:

For 480 volt service, see drawing D9-4.


For 277/480 volt service, Customer shall furnish and install a Company approved, Company lockable, non fused disconnect switch on the supply side of the meter base and a separate load side disconnect with overcurrent protection within 2 ft. of the meter.

Company shall control the supply side disconnect. It shall be labeled "Utility Disconnect" see §1.5 Labels and Disconnects and it shall be available to Company 24 hours a day without notice.

NOTES:

1. Ungrounded Conductor with the Higher Voltage to Ground (Phase marked C) must be marked orange.
2. All sockets, except residential single phase less than 320 Amps, shall have a manual mechanical gang operated bypass switch.
3. Load and supply wires shall not cross in the meter socket.

2	06/15/17	Revised notes as needed.	ERG
1	01/13	REVISION OF DRAWING SS11.8-1	JED
NO.	DATE:	REVISION	BY: APPR:

ENTERGY SERVICES, INC. WIRING DIAGRAM CONNECTIONS FOR OVERHEAD SELF CONTAINED METERS			
APPROVED BY: JRH	DATE: 01/14/2013		
CHECKED BY: JED	SCALE: NONE		
DRAWN BY: krich95			
		No. D9-2	
PLOT 1=1	SH. 1 OF 2		